


FIRE WALL PANEL A-60

PRODUCT OVERVIEW

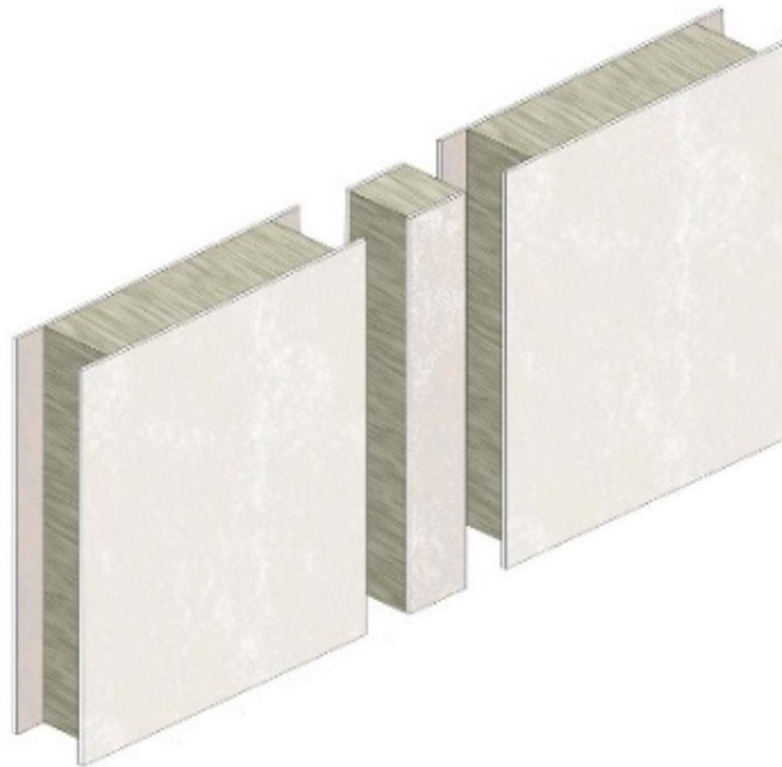

Safety & Construction

- > Panel, tongue and glue made of high-temperature resistant materials.
- > Seamless panel surface is ready for painting, lamination or wall paper decoration.


Services

- > Wall panels are stackable and delivered on pallets.
- > Wall panels can be cut to size for faster installation.
- > Worldwide supply.

Documentation

- > Certificates
(DNV/GL Module B & D, SDoC, DoC).
- > Installation guide.

FIRE WALL PANEL A-60

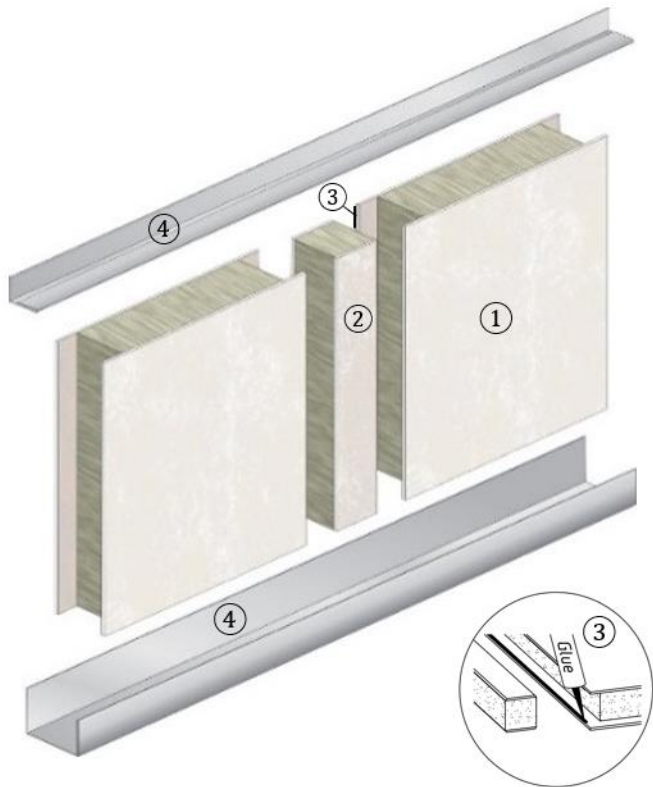

- ① Wall panel
 - ② Tongue
 - ③ Glue connection
 - ④ Profile*
- *not provided by KAEFER

Technical details

Fire properties: Class A-60 bulkhead

System connection: Tongue and glue

Size range

Length: 2.300 mm +/- 3 mm

Width: 600 mm +/- 3 mm

Thickness: 50 mm +/- 3 mm

Physical properties

Panel system weight: c. 23 kg/m²

Airborne sound level (RW): 34 dB

Certification

Module B MEDB00002Y9

Module D MEDD00000DN

Fire Safety Products from KAEFER are used on more than 600 vessels (cruise ships, mega yachts, ferries).

All products complies the Hong Kong International Convention requirements.

DNV·GL



Contact details

KAEFER Schiffsausbau GmbH
Getreidestr. 3
28217 Bremen

Mr. Jan-Timo Kolthammer
+49 421 6109 199
firedoors@kaefer.com

Visit our website or watch our product video for more information.



www.kaefer.com



Product video

If you have any further questions, do not hesitate to contact us.